



AST02-100KG

PRODUCT DESCRIPTION




IP Rating	IP68
Customized	Customized
Rated Output	2.0000 ±0.002mv/V
Recommended Excitation Voltage	5V~ 12V(AC or DC)
Zero Balance	±1%F.S
Output Impedance	350 ± 5Ω
Safe Overload	150%F.S
Construction	Alloy Steel
Citation	GB/T7551-2008/OIML R60

Dimensions

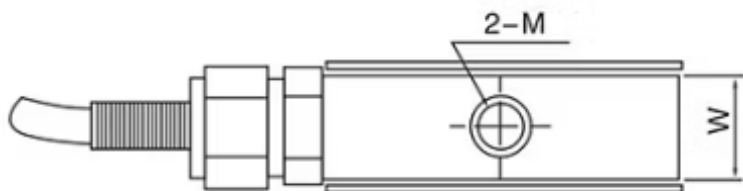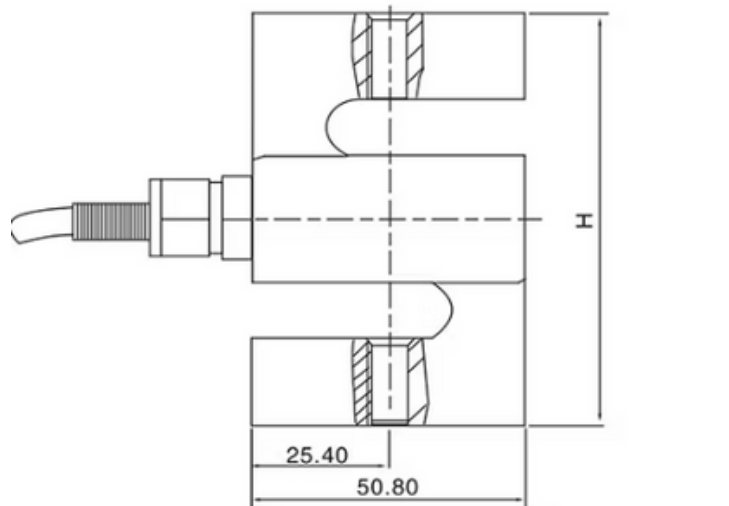

Certification	CE
Rated Load	100kg
Creep(30minutes)	±0.02%F.S
Maximum Excitation Voltage	15V(AC or DC)
Input Impedance	380±10Ω
Insulation Impedance	≥n5000mΩ
Ultimate Overload	200%F.S
Protection Class	IP68&IP67
Total Error	±0.02%F.S

Mode of Connection

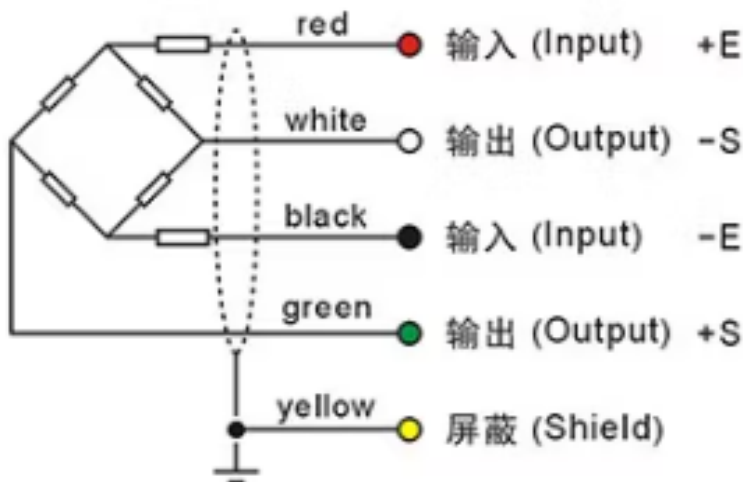

单位: mm

Cap(kg)	L	H	W	M
10~30	50.8	64	13	M8
50~300	50.8	76.2	19.1	M12
500	50.8	76.2	25.4	M12
1000~2000	50.8	76.2	25.4	M12/M16
3000~5000	108	76.2	25.4	M18