



QS-40T

PRODUCT DESCRIPTION

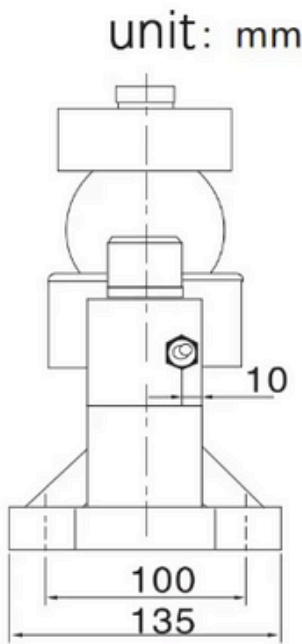

Dimensions

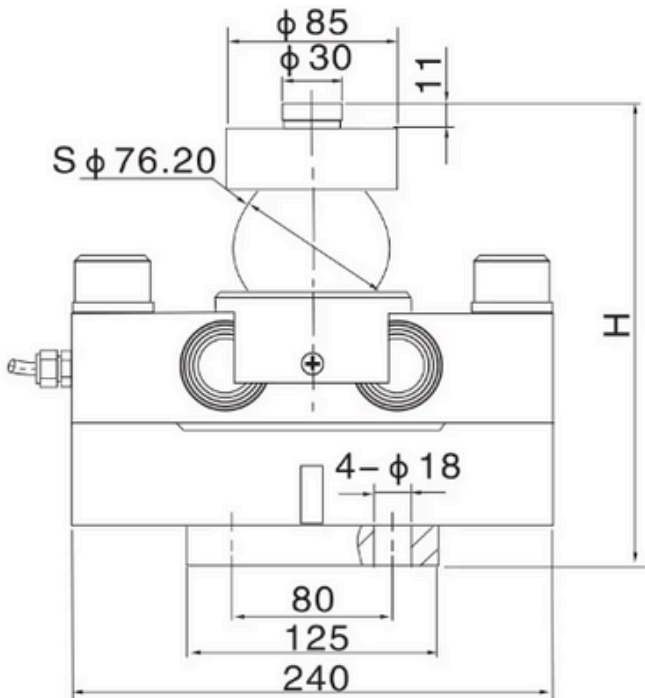

Technical Parameter		
Rated Load	T	10/15/20/25/30/40/50
Sensitivity	mV/V	2.0000±0.002
Total Error	%F.S	±0.02
Creep(30minutes)	%F.S	±0.02
Recommended Excitation Voltage	V	5 ~18 (AC or DC)
Maximum Excitation Voltage	V	24 (AC or DC)
Zero Balance	%F.S	±1
Input Impedance	Ω	775±10/700±7/750±10
Output Impedance	Ω	700±5
Insulation Impedance	MΩ	≥5000
Safe Overload	%F.S	150
Ultimate Overload	%F.S	200
Operating Temperature Range	℃	(-30~+70)
Compensated Temperature Range	℃	(-20~+60)
Temperature Effect On Load	℃	±0.02%F.S/10
Temperature Effect On Zero	℃	±0.02%F.S/10
Construction		Alloy steel
Protection Class		IP67&IP68



Mode of Connection

